


CHLORINE GAS DETECTOR TGT-07B

Chlorine Gas Detector TGT-07B detects chlorine concentration from the gas in more kinds of environments (volume concentration in ppm). It displays the detected chlorine with volume percentage in current environment.

TECHNICAL SPECIFICATION

- Measuring range: 0~100PPM
- Resolution: 0.1PPM
- Measurement error: $\pm 5\%+1$
- Alarming method: sound & light alarm
- Operation temperature: 0~40° (32~104°F)
- Storing temperature: -10 ~ 40° (14 ~ 104°F)
- Operation humidity: 20%~80% RH (relative humidity)
- Storing humidity: 15%~90%RH (relative humidity)
- Pressure limit: A standard atmospheric pressure $\pm 10\%$
- Display: 4 digit LCD
- Power supply: 3×1.5V AAA alkaline batteries
- Battery service life: about 100 hours of continuous use (when the backlight is off)
- Dimension: 172×51×26 (mm)

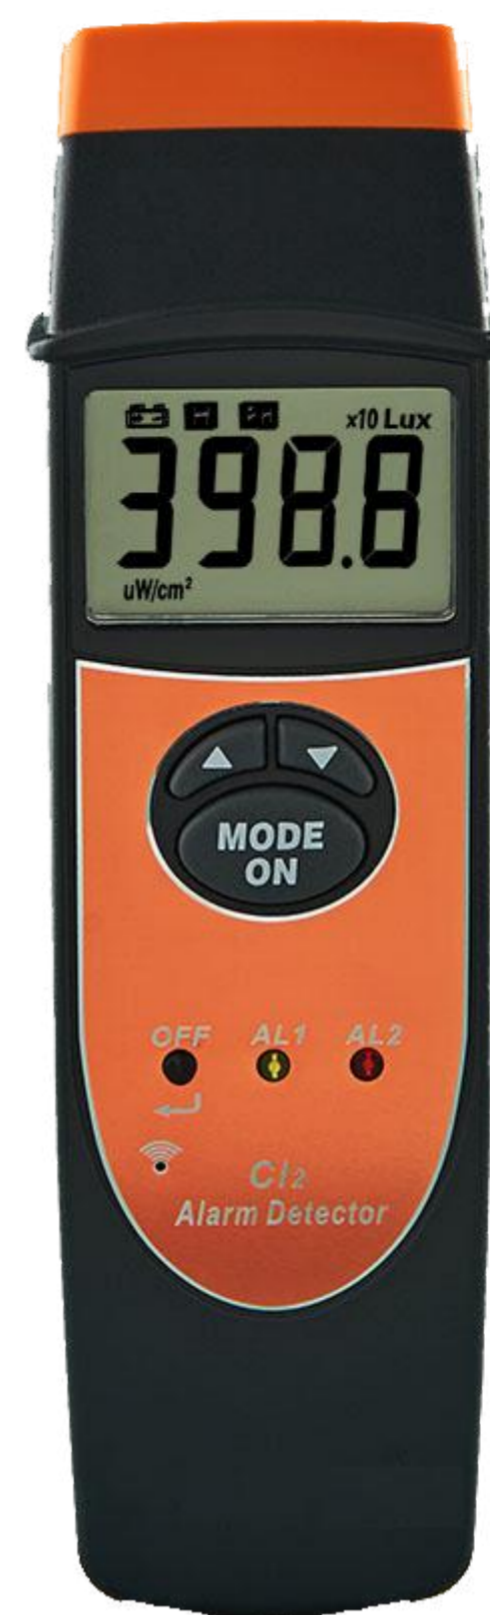

CHLORINE GAS DETECTOR

FEATURES

- Alarming method: sound & light alarm
- Principle of the sensor: electrochemical sensor
- Durable years of the sensor: ~1 years (it can then be replaced)



www.tunix.co.in



products@tunix.co.in



91+ 6264901140

Tunix Corporation, Office No. 520, Block MS 1 A Mall Go-down road, New Siyaganj, Indore, MP India

T & C*

All product specifications, images are indicative, & may change without prior notice, images shown are for reference only, actual product may differ in color, shape and size.